



98-19


98-19

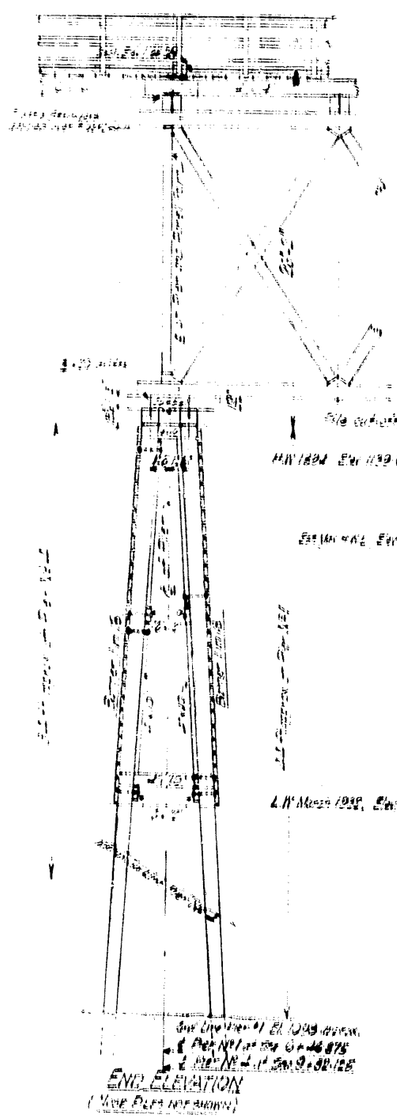


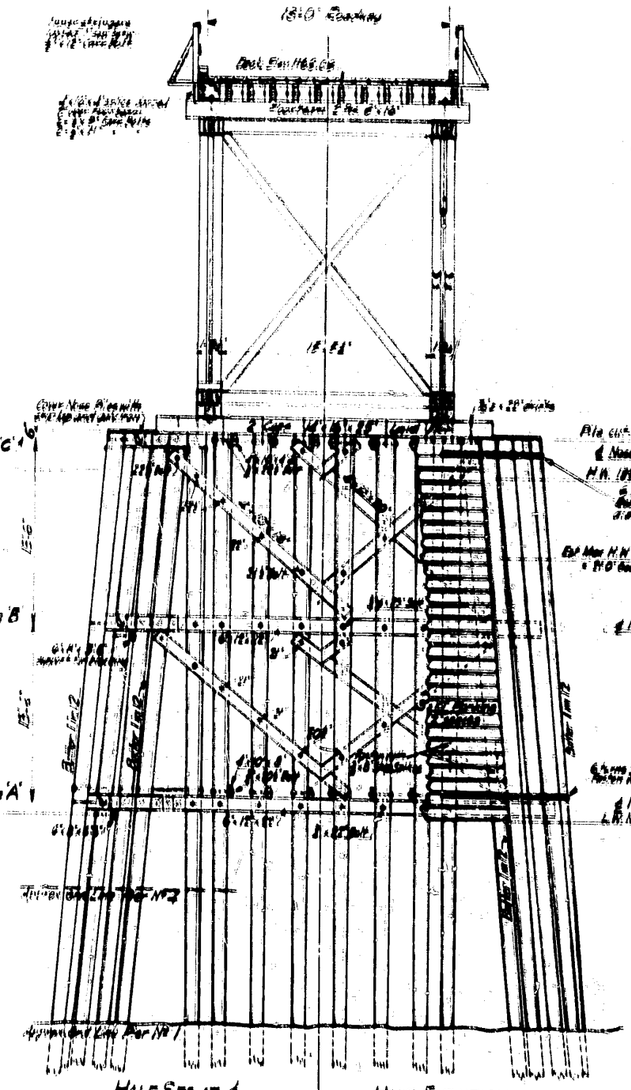

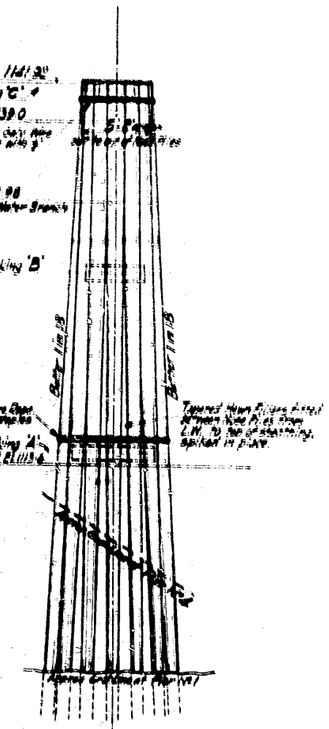



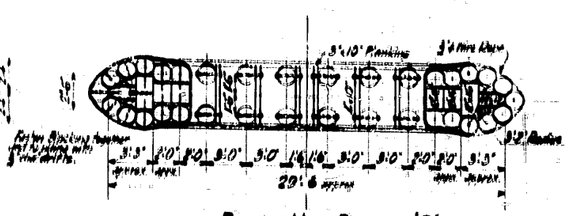



Note

All piles are to be driven to the required
All pile heads are to be cut to the given
elevation shown on the drawings or
The heads of all piles are to be embedded
six inches in the concrete and all steel reinforcing
shall be continued into the concrete footings
Piles No. 1 & 4 to be driven to a minimum
bearing value of 60 tons per square inch

Piles No. 2 & 3 are to be driven to
the minimum of the piling is driven
practically vertical.

All timber in these piers shall be Douglas Fir
to be sound and

KAMLOOPS EAST BRIDGE
OVER
SOUTH THOMPSON RIVER
DETAILS of PIERS 1 & 4
Scale: ¼" = 1 foot

20152

GOVT. of BRITISH COLUMBIA
DEPT. of PUBLIC WORKS
VICTORIA

DRAWN BY C.A.S.	DRAWING NO.
TRACED BY	
CHECKED BY J.T.H.	2487-19
APPROVED	

Formerly Dwg. No. 98-19

98-19